# **ANT-5G-ASM-07 Series**

## GSM/UMTS/LTE/5G NR, 7 dBi, omnidirectional, rubber-duck antennas



#### **Features and Benefits**

- Supports 5G NR and 4G LTE
- High-gain antenna to enhance performance
- Lightweight for portable deployment
- Tilt and swivel design
- Flexible installation
- SMA connector (male) supported

#### Introduction

The ANT-5G-ASM-07 Series is an omnidirectional lightweight compact antenna suitable for GSM, UMTS, LTE, and 5G NR bands. The antenna provides a gain of 7 dBi and is designed to operate in temperatures ranging from -40 to 85°C.

### **Specifications**

#### Antenna Characteristics


Frequency	617 to 960, 1710 to 2170, 2300 to 2690, 3300 to 3800, 4200 to 4700, 5000 to 5925 MHz		
Antenna Type	Omni-directional		
Typical Antenna Gain	1.29 dBi @ 617 to 698 MHz 2.00 dBi @ 698 to 824 MHz 1.29 dBi @ 824 to 960 MHz 3.77 dBi @ 1710 to 1880 MHz 4.55 dBi @ 1850 to 1990 MHz 5.49 dBi @ 1920 to 2170 MHz 5.21 dBi @ 2300 to 2690 MHz 5.14 dBi @ 3300 to 3800 MHz 6.57 dBi @ 4200 to 4700 MHz 7.72 dBi @ 5000 to 5925 MHz		
Connector	SMA (male)		
Impedance	50 ohms		
Polarization	Linear, Vertical		
HPBW/Horizontal	360°		
V.S.W.R.	< 7.5 @ 617 to 698 MHz < 4.5 @ 698 to 824 MHz < 4.4 @ 824 to 960 MHz < 1.9 @ 1710 to 1880 MHz < 2.7 @ 1850 to 1990 MHz < 4.1 @ 1920 to 2170 MHz < 2.1 @ 2300 to 2690 MHz < 2.5 @ 3300 to 3800 MHz < 1.9 @ 4200 to 4700 MHz < 2.0 @ 5000 to 5925 MHz		



Physical Characteristics			
Weight	35.8 g (0.08 lb)		
Length	220 mm (8.66 in)		
Radome Color	Black		
Radome Material	Plastic		
Installation	Straight mount		
Environmental Limits			
Operating Temperature	-40 to 85°C (-40 to 185°F)		
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)		
Ambient Relative Humidity	5 to 95% (30°C, non-condensing)		
Warranty			
Warranty Period	1 year		
Details	See www.moxa.com/warranty		

# **Dimensions**

Unit: mm

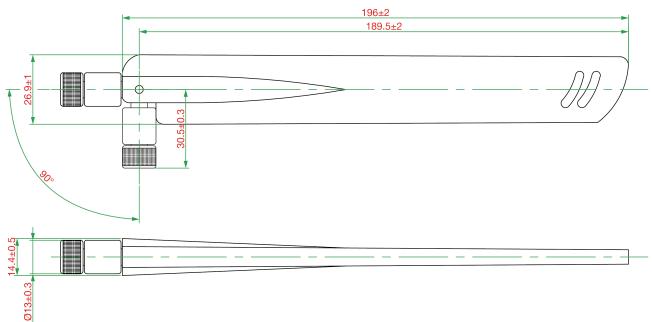

# **Ordering Information**

Model Name	Frequency	Antenna Type	Antenna Gain	Connector Type
ANT-5G-ASM-07	617 to 960 MHz, 1710 to 2170 MHz, 2300 to 2690 MHz, 3300 to 3800 MHz, 4200 to 4700 MHz, 5000 to 5925 MHz	Omnidirectional	7 dBi	SMA (male)

© Moxa Inc. All rights reserved. Updated Dec 03, 2021.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

