


DA-IRIG-B-B-S Series Expansion Modules

Expansion modules with 2-port time-synchronization ports



Features and Benefits


- 2-port IRIG-B time-synchronization module

Introduction

The DA-IRIG-B-B-S module features 3 digital inputs and 4 digital outputs and provides precision timing information using IRIG-B input signals. The module is designed for embedded computers that support the PCI/104 interface.

Appearance

DA-IRIG-B-S-02-T



Specifications

IRIG-B Interface


Interface	DA-IRIG-B-S-02-T: 2 x DB9 male and 1x ST Fiber port
Input Signal	Single or Differential
Input Signal Level	Single: High -> Open, Low -> Short to GND

	Differential: D+ - D- > 0.2 V, RxD is High, D+ - D- < -0.2 V, RxD is Low
Accuracy (Time Synchronization)	±1 μs
Accuracy (Free Running)	±500 ms @ 24 hr
Hardware Requirements	
Bus	PCI slots x 1
Physical Characteristics	
Dimensions (without ears)	167.64 x 106.68 mm (6.6 x 4.2 in)
Weight	DA-IRIG-B-S-02-T: 120 g (0.26 lb)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Declaration	
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	DA-IRIG-B-S-02-T: 1,210,356 hrs
Standards	Telcordia (Bellcore), GB
Warranty	
Warranty Period	3 years
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x DA-IRIG-B-S Series expansion module
Documentation	1 x warranty card

Dimensions

DA-IRIG-B-S-02-T

Unit: mm (inch)

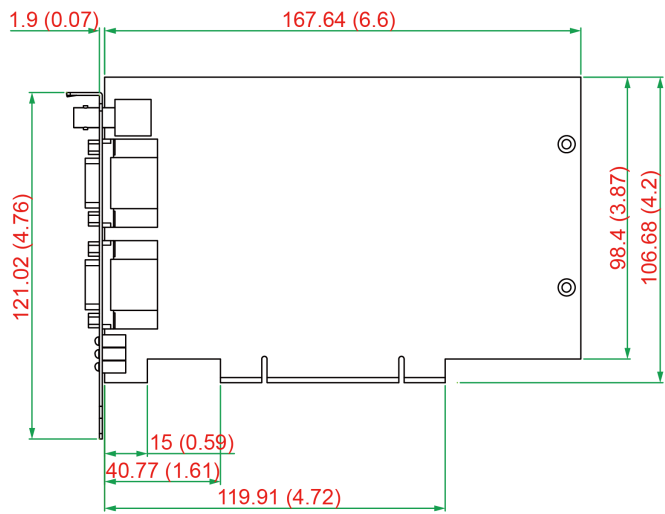

Ordering Information

Model Name	STFiber (in)	DB9Male(in)	DB9Male(out)
DA-IRIG-B-S-02-T	1	1	1

© Moxa Inc. All rights reserved. Updated Aug 11, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.